



CONCRETE CONSOLIDATION

VIBRATORS FOR CONCRETE COMPACTION



THE WORLDWIDE LEADER IN VIBRATION TECHNOLOGY





Intro

Worldwide leader in vibration technology.....	4
Technical features and standard applications	6
Range overview	7
Certifications	10
How to choose the vibrators	12
Optionals.....	13

Internal vibrators

Internal electric vibrators.....	14
Frequency and voltage converters	16
Internal vibrators with built-in converter.....	18
Internal vibrators with pistol grip.....	20
Internal pneumatic vibrators	22

External vibrators

External electric vibrators.....	24
External pneumatic vibrators.....	28
Fastening systems for external vibrators	30
MSP-4 multiple sockets panel.....	31

Systems design

External vibration systems for concrete	32
Vibration systems with pneumatic power supply	36
Innovation and research	37

Extra

Tips and recommendations for use	
Technical drawings	



Worldwide leader in vibration technology

OUR 3 DIVISIONS

PROVIDE CUSTOMERS WITH OPTIMAL SOLUTIONS FOR ALL REQUIREMENTS

INDUSTRIAL VIBRATORS



Electric vibrators and oscillating mounts for vibrating equipment.

FLOW AIDS



Electric and pneumatic vibrators to solve any flowability problem.

CONCRETE CONSOLIDATION



High frequency vibrators, converters and accessories for concrete compaction.



Founded in 1960 in Milan, OLI has undergone remarkable evolution, solidifying its position as **the world's top-selling manufacturer of Industrial Vibrators**. The company has expanded its global presence with **24 Trading Subsidiaries**, over **70 local warehouses**, and **4 manufacturing plants**.

Initially focused on immersion vibrators for concrete consolidation, OLI has emerged as a global leader in vibration technology. Offering a diverse range of **electric** and **pneumatic internal** and **external vibrators**, OLI seamlessly integrates performance and reliability to adapt to dynamic market demands.

OLI has refined its business strategy to prioritize **rapid stock delivery** and unparalleled

technical assistance, ensuring customers worldwide have prompt access to **top-tier products and support**. Exceptional customer service is a cornerstone of OLI's operations, characterized by efficient order processing and universal access to high-quality products and services.

The company boasts a **team of specialized engineers** supported by globally certified management, ready to offer the expertise needed to address customer needs efficiently and safely.

OLI is not only committed to providing cutting-edge equipment but is also at the forefront of **developing innovative products**, aiming to maintain its leadership in the vibration technology industry and continuously set new standards.



TECHNICAL FEATURES AND STANDARD APPLICATIONS

Everything you need to know for perfect concrete compaction

Why vibration is essential in concrete consolidation

Fresh concrete cannot self-compact due to limited fluidity; the application of vibration (internal or external) reduces internal friction, allowing proper flow and compaction.

Vibration is therefore a key step in obtaining strong, durable, and aesthetically refined concrete elements.

Through vibration, the material achieves:

- **Release of trapped air bubbles**, improving density and consistency.
- **Even distribution of aggregates**, reducing voids and increasing homogeneity.
- **Better adhesion** of concrete to reinforcing bars and embedded components.

The benefits of vibration on concrete quality:

- **Higher mechanical strength** and load-bearing capacity.
- **Lower porosity**, making the material more waterproof and resistant to aggressive agents.
- **No cracks or voids** near the reinforcement or within the structure.
- **Perfect mold filling**, ensuring precise shapes and dimensions.
- **Improved surface finish**, ideal for architectural or exposed concrete.
- **Longer lifespan** and superior durability over time.

Types of OLI vibrators for concrete consolidation

Internal Vibrators (Poker or Immersion Vibrators)



Direct contact with concrete

Also known as **poker vibrators** or **immersion vibrators**, these tools are designed for **direct contact with concrete**.

They are flexible, easy to handle, and ideal for compacting: industrial floors, walls and columns,

beams and slabs.

This type of compaction is called **direct internal vibration** because the vibrator is immersed directly in the fresh concrete, ensuring deep and uniform consolidation.

External Vibrators (Electric or Pneumatic Vibrators)



Indirect contact with concrete

External vibrators are used both **on-site** and in **precast concrete production**, especially for exposed or architectural surfaces.

In this case, vibration is transmitted **indirectly through formworks or molds**, providing: exceptional surface quality, consistent density throughout the

element, resistance to weathering and aggressive environments.

These vibrators are ideal for **precast panels, pipes, blocks, and structural elements** where precision and finish are crucial.



OLI vibrators range designed for concrete consolidation

Efficient, reliable, and versatile solutions for every concrete application

OLI offers a full range of high-performance vibrators specifically designed for concrete consolidation. Our products ensure optimal compaction, higher strength, and superior surface finish, whether for on-

site construction or precast concrete production. Every OLI vibrator is engineered for efficiency, reliability, and durability, combining advanced Italian design with global technical support.

Applications

OLI vibrators for concrete consolidation are designed to meet all types of production and construction needs:



Industrial production of precast panels, blocks, sleepers, pipes, and architectural elements. Use in vibrating tables, formworks, and molds of any size.



On-site casting of foundations, columns, walls, slabs.

Built for quality, designed for performance

With over 50 years of experience in vibration technology, OLI combines engineering excellence with global support.

Every vibrator undergoes strict quality control and is compliant with CE, ATEX, and IEC standards, ensuring reliability even in the most demanding environments.

OLI's mission is simple: **to help customers achieve perfect concrete consolidation. Every time, everywhere.**

Trust OLI expertise for the right compaction solution

OLI designs and manufactures a **complete range of concrete vibrators** — both internal and external — ensuring the highest performance, reliability, and ease of use.

Whether working **on site** or in a **precast plant**, OLI provides the right equipment and technical guidance for every application.

Internal vibrators

Internal vibrators (also known as poker vibrators) are used directly inside fresh concrete to remove trapped air and ensure maximum density.

OLI provides several models suitable for different site conditions and concrete mixes.

PHOTO	SERIES	FEATURES	BENEFITS
	High frequency internal vibrator with integrated convert EWO	High frequency (200 Hz / 12,000 vpm). Reliable induction motor, double insulation. Available with multiple hose and head sizes. Optional rubber caps for formwork protection.	Built for intensive on-site use with high efficiency. Available with integrated or separate converters. Ideal for walls, foundations, beams, and slabs. Easy to handle with consistent vibration.
	High frequency internal vibrator VH	Various head diameters and hose lengths available. Strong vibration amplitude for deep consolidation.	Built for intensive on-site use with high efficiency. Ideal for walls, foundations, beams, and slabs. Built for reliable performance in tough conditions.
	Pistol grip VHPG	VHPG version includes a protective housing and handle for improved ergonomics and operator safety.	Compact and sturdy for general site use. Great compaction for small to medium projects. Easy start and smooth operation.
	Pneumatic internal vibrators VHA	Simple design with minimal moving parts. Durable, low-maintenance operation. Hose lengths available up to 6 m.	Ideal for zones or sites with compressed air. Compact and lightweight for easy handling in tight spaces. No electrical parts for maximum safety.

Converters

OLI converters provide the necessary frequency and voltage to operate high-frequency internal and

external vibrators. Designed to be connected to distribution networks or generators.

PHOTO	SERIES	FEATURES	BENEFITS
	Electric frequency converters CM	Output 42 V / 200 Hz for safe operation. Optional multiple socket panels for simultaneous use.	Compact, portable units for one or multiple vibrators. IP44-protected, built for continuous operation. Available in single-phase or three-phase versions.


External vibrators

External vibrators are mounted on formworks, molds, or vibrating tables to ensure uniform consolidation of precast concrete elements.

OLI offers electric and pneumatic solutions that combine power with flexibility.

PHOTO	SERIES	FEATURES	BENEFITS
	Electric external vibrators MVE-HF	IP66 protection rating. Continuous operation with S1 duty. Optional ATEX-certified versions for Zone 22. Adjustable centrifugal force for precision compaction.	For precast concrete elements, vibrating tables, and molds. Delivers consistent vibration for walls, panels, pipes, sleepers, and blocks. Available in centrifugal forces from 300 kg to over 2,400 kg.
	Pneumatic external vibrators HFP	Maintenance-free operation. Safe in explosive or wet environments. Quick installation using OLI clamp systems.	Ideal for industrial sites or areas without electricity. Robust yet lightweight, suitable for various mold shapes and materials. Delivers high-frequency vibration.

Accessories and mounting systems

PHOTO	SERIES	FEATURES
	Clamp CLW	For wooden formworks.
	Clamp CLS	For steel formworks.
	Cradle CRS	For precast molds.
	MSP-4	Power distribution for up to 4 vibrators. In combination with three-phase frequency converters (CMT).
	Rubber Caps	Quick couplings, and flexible hoses available for all internal vibrator series.



Guaranteed safety and quality across all OLI concrete systems

At OLI, product safety, reliability, and quality are at the heart of our concrete consolidation solutions. All our equipment is designed and manufactured in

full compliance with the most rigorous international standards and directives to ensure maximum performance, operator safety, and durability.

Internal electric vibrators



EU legal act and subsequent modifications: 2023/1230 EC - 2014/35/EU

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
VH VHP VHN VHPG		Conformity verified according to the standard documents: IEC60745-1, IEC 60745-2-12, IEC 60034-1

Internal pneumatic vibrators



EU legal act and subsequent modifications: 2023/1230 EC - 2014/34/EU

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
VHA		EU legal act and subsequent modifications: 2023/1230 EC - 2014/34/EU

Frequency and voltage converters



EU legal act and subsequent modifications: 2023/1230 EC - 2014/35/EU

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
CM		Conformity verified according to the standard documents: EN ISO 12100-1, EN 12100-2, CEI EN 60745-1, CEI EN 60745-2-12

Internal vibrators with built-in converter



EU legal act and subsequent modifications: 2023/1230 EC, 2014/30/EU, 2014/35/EU

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
EWO		Conformity verified according to the standard documents: IEC60745-1, IEC 60745-2-12

External electric vibrators



Declaration of conformity "type B" according to: 2014/35/UE - 2023/1230 EC - EN 60034-1

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
MVE-HF		Declaration of conformity "type B" according to: 2014/35/UE - 2023/1230 EC - EN 60034-1
		II3D Ex tc IIIC Tx IP66 Equipment and protective system intended for use in potentially explosive atmospheres (Zone 22) - Directive 2014/34/UE Compliance with Essential Health and Safety Requirements EN 60079-0, EN 60079-31
		Conform to UL1446 and CSA 22.2 No 0-10

External pneumatic vibrators



EU legal act and subsequent modifications: 2023/1230 EC - 2014/34/EU

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
HFP		EU legal act and subsequent modifications: 2023/1230 EC - 2014/34/EU
		I M2 Ex h I 150°C Mb II 2G Ex h IIC T6 GB, 2D Ex h IIIC T80°C Db

Control panel



EU legal act and subsequent modifications: 2023/1230 EC, 2014/30/EU, 2014/35/EU

PRODUCTS	CERTIFICATION	INTERNATIONAL STANDARD
MOBILE or STATIONARY		Conformity verified according to the standard documents: CEI EN 61439-1 2012-02, CEI EN 61439-2 2012-02, CEI EN 60204-1 2006-09, UNI EN ISO 13849-1 2016-01, UNI EN ISO 13849-2 2013-03

Commitment to continuous compliance

OLI continuously updates its production and testing processes to meet evolving international regulations. This commitment ensures that every OLI product,

whether designed for on-site concrete vibration or precast production, is fully compliant, safe, and ready for use in any environment.



HOW TO CHOOSE THE VIBRATORS

The right vibration solution for every concrete application

OLI offers a complete range of vibration systems for concrete consolidation, designed to ensure maximum compaction, strength, and surface quality in every type of project.

Whether you are pouring concrete on site or producing precast elements in a plant, OLI provides the right technology to achieve optimal results.

Two application fields, one goal: **perfect concrete**

Concrete consolidation is a key step in achieving durable and high-quality structures.

Depending on the working environment and the type of formwork, OLI offers two main vibration solutions:



Construction sites



Internal vibrators
Frequency and voltage converters

For construction sites, OLI designs and supplies internal vibrators (poker vibrators), frequency and voltage converters, and portable vibration systems that make compaction fast, effective, and easy to handle even in demanding conditions.

Benefits:

- Excellent concrete density and surface finish
- Quick removal of air bubbles and voids
- Robust and reliable equipment for continuous operation



Precast concrete vibration



External vibrators
Vibration systems

For industrial production environments, OLI provides a wide range of external vibrators for formwork and mould vibration systems developed specifically for precast concrete elements.

Benefits:

- Consistent product quality and dimensional accuracy
- High productivity and reduced cycle times
- Adaptable systems for any mold or formwork size

Innovation, reliability, and global support

With decades of experience in vibration technology, OLI combines Italian engineering with a worldwide service network.

Every product is designed to deliver efficiency, durability, and easy maintenance, supported by local

experts who help customers choose the most suitable system for their specific application.

At OLI, we don't just supply vibration equipment, we provide complete concrete consolidation solutions that help you build stronger, faster, and better.



Options & Accessories for OLI Concrete Products

OLI offers a complete range of optional features and accessories designed to enhance the performance, versatility, and durability of its concrete consolidation systems.

Whether you are working on site or in precast production, choosing the right accessories ensures safe operation, easier installation, and improved compaction results.

TECHNICAL SUPPORT

Choosing the right accessories can make a significant difference in the quality, efficiency, and durability of your concrete consolidation process.

OLI's technical team is available to provide custom consulting and help you select the most suitable accessories for your application.

Options for Internal Vibrators

Different hose lengths	Rubber cap	Quick connect fittings with filter
For internal vibrators, hoses are available in various lengths, allowing greater flexibility when working on complex sites or deep structures.	All internal electric vibrators (VH, EWO, VHPG) can be equipped with a rubber cap to protect the vibrating head and prevent contact damage with formworks.	Only for VHA. Quick-connect fittings with integrated filters make installation and maintenance easier, ensuring clean airflow and optimal vibrator performance.

Accessories for External Vibrators

CLW - Clamp for wooden formworks	CLS - Clamp for steel formworks	CRS - Cradle for steel moulds
Quick mounting system with safety cable included. Galvanized steel finish. Compatible with OLI electric and pneumatic vibrators. Suitable for Doka, Peri, Meva, Paschal, Noe, Hünnebeck and similar systems.	Secure fastening with safety cable included. Galvanized steel finish. Designed for steel formworks in site applications Suitable for Doka Framax XLife, Peri Trio, Meva Mammüt, and similar systems	Ideal for precast applications. Enables quick positioning and easy removal of external vibrators. Available in various sizes to match vibrator dimensions

Electrical accessories

MSP-4 multiple socket panel	Switch box
This distribution panel allows the simultaneous connection of up to 4 external vibrators (depending on the model). It ensures reliable power distribution, easy control, and simplified wiring on both mobile and stationary installations.	An optional push-button control box that improves safety and user convenience, allowing remote activation and control of the vibrators.

Features for Electric and Pneumatic Systems

Power cable and plug with resin filled terminal box	Air distribution systems
Available for both electric and pneumatic high-frequency vibrators, this option enhances safety, protection against moisture, and mechanical stress resistance.	OLI also supplies optional air distribution networks, including main lines, ball valves, fittings, and solenoid valves — ensuring optimal airflow for consistent vibration performance.



INTERNAL ELECTRIC VIBRATORS

Flexible and easy-to-use vibrating systems are required whenever there is the construction of industrial floors, walls, columns, slabs, etc. In such cases high-frequency immersion vibrators are generally used, known as “poker” or simply “vibrating needles”. They come into direct contact with the concrete; for this reason, we speak of internal direct vibration.

HOW THE VH VIBRATORS WORK

An eccentric mass is housed inside the vibrating head (or needle) which is fixed to a rotating shaft powered by a three-phase asynchronous AC motor. During rotation, the eccentricity of the mass generates rotational movements to the vibrating head.

The **robustness** and the **constant rotation speed** are essential factors in the compaction of the concrete: a drop in the speed and centrifugal force heavily reduce the quality of the manufactured article.

The VH is a robust and reliable product, which is suitable for compacting the concrete and it is appropriate for continuous operation.


Important:

The VH has to be operated by electric or electronic converters that convert the 50/60 Hz main frequencies to 200 Hz. This is necessary for the vibrating head in order to reach a vibration speed of 12,000 vpm, as it is ideal for the proper compaction.



Benefits

- » No overheating
- » Easy maintenance
- » Long life of the vibrator head
- » 100% Water Proof

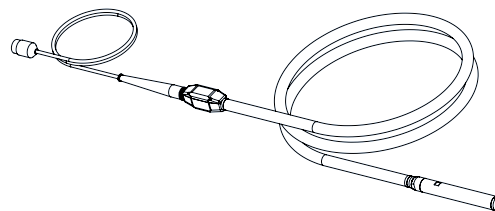

MAXIMUM DURABILITY
HIGH PERFORMANCE



VH

Internal electric vibrators



VHP



VHN

Model								DIMENSIONAL SPECIFICATIONS			
	CF	Rated current *	Rated power (42V)	Action diameter *	Amplitude	Noise level	Compaction power *	Head Diameter	Head Length	Head Weight	Total Weight
	N	A	Hp	in	in	dB A	CF/h	in	in	lb	lb
VHN 38	1,700	8	0.67	17.7	0.07	70	706	1.50	15.90	5.30	23.4
VHN 50	3,080	11	0.80	23.6	0.08	76	883	1.97	15.87	9.70	32.6
VHN 59	4,560	12	1.21	31.5	0.09	76	1,236	2.32	16.54	15.00	38.4
VHP 50	3,760	15	1.21	27.6	0.08	76	1,413	1.97	18.43	11.90	36.2
VHP 59	5,640	17	1.48	35.4	0.09	79	1,589	2.32	19.61	18.00	43.2
VHP 65	7,330	24	1.74	43.3	0.10	79	1,766	2.56	19.06	20.70	49.4

VH - INTERNAL ELECTRIC VIBRATORS

APPLICATION	Concrete compaction
DESCRIPTION	Internal electric vibrators for concrete consolidation characterised by high performance, consistent speeds, and remarkable resistance to abrasion

FEATURES

DUTY CYCLE	Continuous S1
INPUT	42V - 3ph - 200Hz
NOMINAL FREQUENCY	12,000 vpm
INSULATION CLASS	F (T° max = 311 °F)
THERMAL SWITCHES	Inside the stator. Max T °C = 302 °F
WORKING TEMPERATURE	From -4 °F to +104 °F
HEAD	N.2 ball bearings VHN 38 / VHN 50 / VHN 59 - N.4 ball bearings VHP 50 / VHP 59 / VHP65 Protection class IP68 Hardening treatment for VHN and chrome plating for VHP
SWITCH BOX	Polyamide (nylon +30% fiber glass) with gasket, cable protection, yellow colour IP66 protection Designed for continuous use and resistant to wear and tear
OPERATING HOSE	5 m SBR rubber hose with inner textile reinforcement
SUPPLY CABLE	10 m neoprene electric cable HO7RN-F with 3 pin plug [42V - 3 phase, IP44]
FINISHING	VIBRATING HEAD: steel (VHN), chromate (VHP) SWITCH BOX: colour yellow Ral 1007
CERTIFICATIONS	 EU legal act and subsequent modifications: 2023/1230 EC - 2014/35/EU Conformity verified according to the standard documents: IEC60745-1, IEC 60745-2-12, IEC 60034-1
OPTIONS	Rubber cap Hose lenght up to 10 mt



Rubber cap



FREQUENCY AND VOLTAGE CONVERTERS

The internal vibrating needles need to be powered via a three-phase electric line at low voltage and high frequency, therefore it is necessary to use a voltage and frequency converter.

The electromechanical rotary converters consist of a motor and a generator, which are coupled together. The motor converts the electrical energy into mechanical energy; the generator converts the mechanical energy into electrical energy, thus generating the required voltage and frequency (42 Volt - 200 Hz).

The converters of the CM range are designed to supply simultaneously and in a continuous cycle one or more high-frequency internal vibrators; they are reliable, durable and do not require maintenance.


The minimal design and the materials used **facilitate the external cleaning**, while the special internal air ducting system **avoids overheating**.

The range comprises several models, which are **capable of supplying from 1 to 4 immersion vibrators**.



Benefits

- » No overheating
- » No maintenance
- » Optimal cooling
- » Easy cleaning

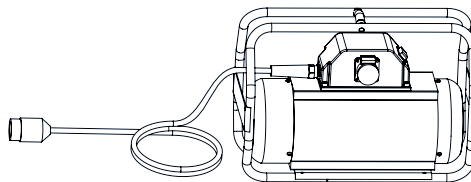

LONG LIFE
OPTIMUM COOLING



Frequency and voltage converters – 50Hz only



CMM 11



CMM 15



CMM 25, CMT 25



CMT 55, CMT 85

Model	Frame	Outlets	Supply Electric Cable	Weight	INPUT			OUTPUT		
					Input Voltage and Frequency	Current	Power	Output Voltage and Frequency	Current	Power
					V / f	A	Hp	V / f	A	kVA
CMM 11	Handle	1	138	37.48	230V, 1ph, 50Hz	2.5	0.67	42V ± 10% 3ph 200Hz	11	0.8
CMM 15	Handle	1	138	52.91		6	1.48		14	1.0
CMM 25	Frame	2	138	74.96		10	2.41		25	1.8
CMT 25	Frame	2	138	72.75	400V 3ph 50Hz	5	2.95		25	1.8
CMT 35	Wheeled	3	197	81.57		6	3.75		36	2.6
CMT 55	Wheeled	3	197	114.64		9	5.90		55	4.0
CMT 85	Wheeled	4	197	127.87		12	8.85		85	6.2

COMPATIBILITY TABLE						
Maximum number of vibrators that can be connected						
CMM 11	1x VHN 38	1x VHN 50	-	-	-	-
CMM 15	1x VHN 38	1x VHN 50	1x VHN 59	-	-	-
CMM 25	2x VHN 38	2x VHN 50	2x VHN 59	1x VHP 50	1x VHP 59	1x VHP 65
CMT 25	2x VHN 38	2x VHN 50	2x VHN 59	1x VHP 50	1x VHP 59	1x VHP 65
CMT 35	3x VHN 38	3x VHN 50	3x VHN 59	2x VHP 50	2x VHP 59	1x VHP 65
CMT 55	3x VHN 38	3x VHN 50	3x VHN 59	3x VHP 50	3x VHP 59	2x VHP 65
CMT 85	4x VHN 38	4x VHN 50	4x VHN 59	4x VHP 50	4x VHP 59	3x VHP 65

CM - FREQUENCY AND VOLTAGE CONVERTERS

APPLICATION	Concrete compaction
DESCRIPTION	Frequency and voltage converters equipped with permanent magnets, specifically designed to power high frequency concrete vibrators continuously

FEATURES

DUTY CYCLE	Continuous S1
INSULATION CLASS	F (T° Max = 311 °F)
PROTECTION	Overload protection
WORKING TEMPERATURE	From -4 °F to +104 °F
CONNECTION BOX	Polyamide (nylon + 30% fibre glass), complete with switch and sockets (42V three phase, IP44 protection)
SUPPLY CABLE	Neoprene electric cable H07RN-F with plug
FINISHING	Powder coating (body orange Ral 2009; fan covers, wheels and frame black Ral 9007)
CERTIFICATIONS	 EU legal act and subsequent modifications: 2023/1230 EC - 2014/35/EU Conformity verified according to the standard documents: EN ISO 12100-1, EN 12100-2, CEI EN 60745-1, CEI EN 60745-2-12
DESIGN	Smooth and robust cast aluminium body Forced ventilation



INTERNAL VIBRATORS WITH BUILT-IN CONVERTER

On construction sites, during the consolidation of the concrete, a light, flexible and easy-to-use tool is often required, which **can be connected directly to the common single-phase power lines** (230 or 110 Volt, 50/60 Hz).

The solution to fulfil this need is the **EW0** range: **high-frequency immersion vibrators equipped with an integrated electronic frequency converter** capable of transforming the single-phase input voltage (230V or 110V, 50/60 Hz) into the three-phase voltage (230 V, 200 Hz) necessary to obtain 12,000 vpm.


Compared to the common vibrating needles powered by electromechanical converters, the EW0 vibrators have several advantages:

- They are **light and flexible**.
- The constant output frequency maintains the maximum centrifugal force and thus a **high and consistent performance**.
- There is a **protection** against short circuits, excessive temperature, overvoltage and overcurrent above or below the nominal values.



Benefits

- » Reliable
- » Safe & easy to handle
- » No overheating
- » Easy maintenance

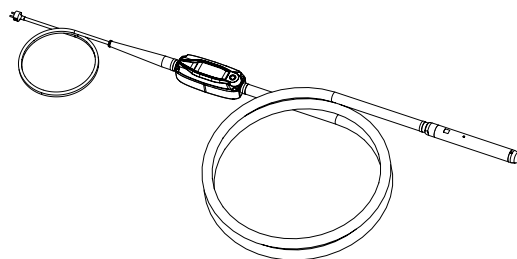

COMPACT SOLUTION



Internal vibrators with built-in converter



EWO 38C

Model	CF	Rated Current*	Rated power (230V)	Action Diameter **	Amplitude	Noise Level ***	Compaction Power **	DIMENSIONAL SPECIFICATIONS			
								Head Diameter	Head Length	Head Weight	Total Weight****
	N	A	Hp	in	in	DB A	CF/h	in	in	lb	lb
EWO 38C	1,700	1.5	0.67	17.7	0.07	70	706	1.5	15.9	5.3	32
EWO 50C	3,760	2.7	1.21	27.6	0.08	76	1,413	1.97	18.43	11.5	44.1
EWO 59C	5,640	3.0	1.48	35.4	0.09	79	1,589	2.32	19.61	18.0	50.3
EWO 65C	7,330	4.5	1.74	43.3	0.10	79	1,766	2.56	19.06	20.7	54.7

* Refer to centrifugal force for amperage assessment

** Measurements vary according to concrete quality and thickness

*** Measured at 1 m distance

**** Packaging included.

Model	Input Voltage	Input Frequency	Input Amperage
Converter 230	230V ±10% 1ph	50/60Hz	5.5 A

EWO - INTERNAL VIBRATORS WITH BUILT-IN CONVERTER

APPLICATION	Concrete compaction
DESCRIPTION	Equipped with compact electronic frequency converters integrated into the supply cable, characterised by high centrifugal forces, constant speeds and high wear resistance

FEATURES

DUTY CYCLE	Continuous S1
INPUT	230V ± 10% 50/60 Hz -1 ph
NOMINAL FREQUENCY	12.000 vpm
MOTOR INSULATION CLASS	F (T° max = 311 °F)
PROTECTION CLASS	Head protection IP68 Converter protection IPX8 The inverter is protected against overcurrent, overvoltage, excess temperature and short circuit. A LED light shows the presence of a fault
WORKING TEMPERATURE	From -4 °F to +104 °F
HEAD	Equipped with 4 ball bearings greased for life Hardening treatment (EWO 38C), chrome plating (EWO 50C, EWO 59C, EWO 65C)
SWITCH BUILT-IN	Complete with reinforced gasket
PROTECTION HOSE	5 m SBR rubber hose with textile reinforcement
SUPPLY CABLE	10 m neoprene electric cable H07RN-F with CEE 7/4 (SCHUKO) 220V 2P+1G 16A plug
CONVERTER	Sturdy cast aluminium box Ergonomic and lightweight (3 Kg)
INVERTER	Tropicalised and protected against vibration, moisture and shocks with a special resin
FINISHING	Painted orange Ral 2009 and chrome plating
CERTIFICATIONS	 EU legal act and subsequent modifications: 2023/1230 EC, 2014/30/EU, 2014/35/EU Conformity verified according to the standard documents: IEC60745-1, IEC 60745-2-12
OPTIONS	Rubber cap Hose lenght up to 10 mt



INTERNAL VIBRATORS WITH PISTOL GRIP

For **thin layers of concrete**, such as floors or slabs, a short, light and manoeuvrable vibrator is needed. For all these cases, the ideal solution is to use a **pistol grip poker**.

Through a switch located in the pistol, the operator is able to activate and deactivate the vibrator as needed and **move easily** on the construction site.

The highest level of safety is ensured through a low voltage needle (42V) as well as perfect compaction and aesthetic results are obtained thanks to the high speed (12,000 vpm).

Important:

The VHPG has to be operated by electric and electronic converters that convert the 50/60 Hz mains frequency to **200 Hz**, which is necessary in order for the vibrating head to reach a vibration speed of 12,000 vpm, as it is ideal for the proper compaction.



Benefits

- » Compact solution
- » Lightweight
- » Long life of the vibrator head



EASY TO HANDLE



Internal vibrators with pistol grip



Model	CF	Rated current *	Rated power [42V]	Action diameter *	Amplitude	Noise level	Compaction power *	DIMENSIONAL SPECIFICATIONS			
	N	A	Hp	in	in	dB A	CF/h	Head Diameter	Head Length	Head Weight	Total Weight
								in	in	lb	lb
VHPG 38	1,700	8	0.67	17.72	0.07	70	706.29	1.50	15.91	0.24	0.75
VHPG 50	3,080	11	0.80	23.62	0.08	76	882.87	1.97	15.87	0.45	0.96
VHPG 59	4,560	12	1.21	31.50	0.09	76	1,236.01	2.32	16.54	0.69	1.20

* Measurements vary according to the quality and thickness of the concrete.

** Equipped with roller bearings

VHPG - INTERNAL VIBRATORS WITH PISTOL GRIP

APPLICATION	Concrete compaction
DESCRIPTION	High frequency internal electric vibrators for concrete consolidation characterised by high performance, consistent speeds, and remarkable resistance to abrasion.

FEATURES

DUTY CYCLE	Continuous S1
INPUT	42V - 3ph - 200Hz
NOMINAL FREQUENCY	12,000 vpm
INSULATION CLASS	F (T° max = 311 °F)
THERMAL SWITCHES	Inside the stator. Max T °C = 302 °F
WORKING TEMPERATURE	From -4 °F to +104 °F
HEAD	Ball bearing: n.2 VHPG 50 / VHPG 59 - n.4 VHPG 38
PLASTIC PISTOL	Grip with cable protection, green colour IP54 protection
OPERATING HOSE	0.8 m SBR rubber hose with inner textile reinforcement
SUPPLY CABLE	10 m neoprene electric cable HO7RN-F with 3 pin plug [42V - 3 phase, IP44]
FINISHING	VIBRATING HEAD: chrome painted
CERTIFICATIONS	 EU legal act and subsequent modifications: 2023/1230 EC - 2014/35/EU Conformity verified according to the standard documents: IEC60745-1, IEC 60745-2-12, IEC 60034-1
OPTIONS	Rubber cap





INTERNAL PNEUMATIC VIBRATORS

VHA is a reliable vibration system designed to provide **high operating frequency** with high working efficiency under safe conditions. For this reason it is ideal for every type of compaction: from lab tests to heavy infrastructure projects.

There are **no moving parts inside the hose**, this means less vibration on the hands and arms of the operator and an extended service life.

As a pneumatic vibrator, **VHA doesn't need electricity** and can even work out of concrete without overheating. This means no work interruptions even in severe conditions.

Ease-of-use and **maintenance-free** make the VHA the perfect solution for compacting concrete when electricity is not available.



Benefits

- » High working efficiency
- » No work interruptions
- » Maintenance free
- » Safe



NO ELECTRICITY



Internal pneumatic vibrators



Model					DIMENSIONAL SPECIFICATIONS		
	CF	Vibration	Working Pressure	Air Consumption	Head Diameter	Head Length	Total Weight
	N	vpm	psi	CF/min	in	in	lb
VHA 40	2,712	22,000	94.3	17.50	1.57	9.06	8.82
VHA 50	5,627	17,000	94.3	28.00	1.97	9.84	12.79
VHA 60	9,321	12,000	94.3	31.50	2.36	11.42	16.75
VHA 80	15,829	11,000	94.3	45.50	3.15	12.99	31.31

VHA - INTERNAL PNEUMATIC VIBRATORS

APPLICATION Concrete compaction

DESCRIPTION High frequency internal pneumatic vibrators for concrete consolidation

FEATURES

DUTY CYCLE Continuous

WORKING PRESSURE 94.3 psi

AIR SUPPLY QUALITY 5.4.4

WORKING TEMPERATURE 14°F / +140°F

MAX NOISE LEVEL 99 dB (A)

TECHNOLOGY Eccentric rotor

HEAD MATERIAL Steel

FINISHING Chrome

OPERATING HOSE 2 m SBR rubber hose with inner textile reinforcement

CERTIFICATIONS



EU legal act and subsequent modifications: 2023/1230 EC - 2014/34/EU

OPTIONS Different length of the hose (up to 6 m)
Quick connect fittings with filter included



EXTERNAL ELECTRIC VIBRATORS

High frequency electric vibrators are used in construction sites and in precast manufacturing plants to obtain high-quality products (exposed concrete), with **excellent aesthetic results and weather resistance**. The vibration is transmitted to the concrete **indirectly** through formworks or mould.

Just like the internal vibrators, the external ones are also based on the principle of the vibration produced by the rotation of an eccentric mass powered by a three phase electric motor.

Low speed vibration (3,000 rpm) is used on high-density and unreactive concretes mostly, as they allow a fast displacement of the aggregates. High speed vibration (6,000 or 9,000 rpm) is recommended with low-density concretes and in applications where high surface quality is required.

The possibility to adjust both the frequency and the speed (from 0 up to 9,000 rpm) guarantees the achievement of the perfect operational frequency. It depends on the type of concrete to vibrate as well as the natural resonant frequency of the mould.

The OLI external electric vibrators are characterised by **high operating efficiency** and **ease of installation**. Specially designed attachment devices (quick-coupling clamps) reduce the time required for installing and repositioning.


This vibration system is recommended when:

- High construction elements and narrow walls (partitions, columns, beams) have to be compacted, which are difficult to vibrate with other systems.
- The reinforcement density inside the housing is high.



Benefits

- » ATEX certification
- » Low noise level
- » Easy to install



ADJUSTABLE FREQUENCY



MVE FOOT MOUNTED

External high frequency vibrators

A



B



C



Class II Div.2: Temp. Class **T4**
ExII 3D Temp. Class: 135 °C



Wm in*lb	Model	Weight lb	Centrifugal Force lb	rpm	ELECTRICAL SPECIFICATIONS					
					Input Power	Frequency	Nominal Current A Max.		COS Φ	Cable Gland
					Hp	Hz	42V	220-240V/400-460V		Metric
1.28	MVE 650/4N-HF-10A0	10,14	655	0-6,000	0.36	0-200	5	0.92/0.53	0.75	M20
5.92	MVE 3000/4N-HF-38E0	26,46	3,027	0-6,000	1.34	0-200	15	2.80/1.62	0.89	M25
6.35	MVE 3100/2N-HF-50A0	47,84	3,250	0-6,000	1.74	0-100	23	4.22/2.44	0.77	M25
6.35	MVE 3100/2N-HF-53A0	66,14	3,250	0-6,000	1.74	0-100	23	4.22/2.44	0.77	M25
6.35	MVE 4100/2N-HF-53A0	66,14	4,475	0-6,000	1.74	0-100	23	4.22/2.44	0.77	M25
10.29	MVE 5340/4N-HF-53A0	66,14	5,254	0-6,000	2.15	0-200	24	4.38/2.53	0.91	M25
4.08	MVE 4100/2N-HF-53A0	66,14	4,753	0-9,000	2.01	0-150	28	5.02/2.90	0.75	M25

NOTE: All the vibrators can be used in variable frequency if connected to the electronic control panel of OLI.

Model	Drawing	Size	DIMENSIONAL SPECIFICATIONS (inch)												
			C	M	A	B	Ø G	Holes	D	E	F	H	I	L	N
MVE 650/4N-HF-10A0	A	10A0	8.3	1.8	2.44-2.91 / 1.3	4.2 / 3.27-4.02	0.4-0.3	4	5.1	5.3	0.4	2.0	3.8	4.2	3.3
MVE 3000/4N-HF-38E0	B	38E0	10.0	1.7	3.5	6.1	0.7	4	7.4	7.7	4.8	3.5	6.9	6.7	6.1
MVE 3100/2N-HF-50A0	C	50A0	12.6	2.4	4.7	6.7	0.7	4	8.2	8.3	0.9	3.8	7.3	7.6	6.7
MVE 3100/2N-HF-53A0	C	53A0	15.4	3.8	3.9	7.1	0.7	4	9.3	8.3	0.9	3.8	7.3	7.4	6.7
MVE 4100/2N-HF-53A0	C	53A0	15.4	2.4	3.9	7.1	0.7	4	9.3	8.3	0.9	3.8	7.3	7.4	6.7
MVE 5340/4N-HF-53A0	C	53A0	15.4	3.8	3.9	7.1	0.7	4	9.3	8.3	0.9	3.8	7.3	7.4	6.7
MVE 4100/2N-HF-53A0	C	53A0	15.4	3.8	3.9	7.1	0.7	4	9.3	8.3	0.9	3.8	7.3	7.4	6.7

FOOT MOUNTED ELECTRIC VIBRATORS

APPLICATION	Concrete compaction
DESCRIPTION	High frequency electric vibrator, foot mounted, external application

FEATURES

DUTY CYCLE	Continuous S1
MULTIVOLTAGE	3ph 42V - 3ph 230/400V [* voltage tolerance ± 10%]
VARIABLE FREQUENCY	0-100Hz - 0-150Hz - 0-200Hz
WORKING TEMPERATURE	14 °F / +104 °F
MAX NOISE LEVEL	85 dB(A) at 1 meter distance
MATERIAL	Aluminium or cast iron
FINISHING	Painted: orange RAL 2009

CERTIFICATIONS



II3D Ex tc IIIC Tx IP66
Equipment and protective system intended for use in potentially explosive atmospheres (Zone 22) -
Directive 2014/34/UE
Compliance with Essential Health and Safety Requirements
EN 60079-0, EN 60079-31



Declaration of conformity "type B" according to: 2014/35/UE - 2023/1230 EC - EN 60034-1



Conform to UL1446 and CSA 22.2 No 0-10


OPTIONS	Power cable and plug terminal box fulfil of resin
ACCESSORIES	Fixing brackets: CLW (Clamp for Wooden formworks); CLS (Clamp for Steel formworks) only for MVE 650/4N-HF-10A0



MVE CRADLE MOUNTED

External high frequency vibrators

E



MVE size 39

F



MVE size 50

Class II Div.2: Temp. Class **T4**
ExII 3D Temp. Class: 135 °C



Wm	Model	Weight	Fixing	Centrifugal Force	rpm	ELECTRICAL SPECIFICATIONS					
						Input Power	Frequency	Nominal Current A Max.		COS Φ	Cable Gland
								42V	230/400V		
in*lb		lb	Model	lb		Hp	Hz				Metric
5.92	MVE 3000/4N-HC-39A0	39.68	CRS059	3,027	0-6,000	1.34	0-200	15	2.80/1.62	0.89	M25
6.35	MVE 3100/2N-HC-50A0	61.73	CRS080	3,250	0-6,000	1.74	0-100	23	4.22/2.44	0.77	M25
8.23	MVE 4100/4N-HC-50A0	61.73	CRS080	4,204	0-6,000	1.74	0-100	23	4.22/2.44	0.77	M25
8.23	MVE 4100/4N-HC-50A0	61.73	CRS080	4,204	0-6,000	2.15	0-200	24	4.38/2.53	0.91	M25
4.08	MVE 4100/2N-HC-50A0	61.73	CRS080	4,753	0-9,000	2.01	0-150	28	5.02/2.90	0.75	M25

* MVE 1300/6N-HC-50A0 comes with eccentric weights set at 50%. Wm and centrifugal force refer to 6,000 rpm.

DIMENSIONAL SPECIFICATIONS (inch)															
Model	Drawing	Size	C	M	A	B	Ø G	Holes	D	E	F	H	I	L	N
MVE 3000/4N-HC-39A0	E	39A0	10.9	1.7	4.8	/	0.8	1	7.4	6.8	7.8	3.7	6.3	2.7	6.1
MVE 3100/2N-HC-50A0	F	50A0	12.6	2.4	5.4	/	1.0	1	9.4	7.2	8.6	4.0	7.3	3.4	6.7
MVE 4100/4N-HC-50A0	F	50A0	12.6	2.4	5.4	/	1.0	1	9.4	7.2	8.6	4.0	7.3	3.4	6.7
MVE 4100/4N-HC-50A0	F	50A0	12.6	2.4	5.4	/	0.9	1	9.4	7.2	8.6	4.0	7.3	3.4	6.7
MVE 4100/2N-HC-50A0	F	50A0	12.6	2.4	5.4	/	1.0	1	9.4	7.2	8.6	4.0	7.3	3.4	6.7

CRADLE MOUNTED ELECTRIC VIBRATORS

APPLICATION Concrete formworks

DESCRIPTION High frequency electric vibrator, cradle mounted, external application

FEATURES

DUTY CYCLE Continuous S1

MULTIVOLTAGE 3ph 42V - 3ph 230/400V (voltage tolerance ± 10%)

VARIABLE FREQUENCY 0-100Hz - 0-150Hz - 0-200Hz

WORKING TEMPERATURE 14 °F / +104 °F

MAX NOISE LEVEL 85 dB(A) at 1 meter distance

MATERIAL Cast iron

FINISHING Painted: orange RAL 2009

CERTIFICATIONS



II3D Ex tc IIIC Tx IP66
Equipment and protective system intended for use in potentially explosive atmospheres (Zone 22) - Directive 2014/34/UE
Compliance with Essential Health and Safety Requirements
EN 60079-0, EN 60079-31



Declaration of conformity "type B" according to: 2014/35/UE - 2023/1230 EC - EN 60034-1



Conform to UL1446 and CSA 22.2 No 0-10

OPTIONS Power cable and plug terminal box fulfill of resin

ACCESSORIES Fixing bracket: CRS (Cradle for Steel concrete moulds)

Technical drawings in the last page →



INTERNAL VIBRATORS

EXTERNAL VIBRATORS

SYSTEMS DESIGN



EXTERNAL PNEUMATIC VIBRATORS

The external pneumatic vibrators have **no electrical components**.

They are powered via **air compressor** that spins the rotors inside the vibrator at a very high speed (generally between 10,000 and 17,000 vpm). This generates a circular vibration that spreads in all directions.

The optimum frequency varies depending on the dimensions of the aggregates: a low frequency (approximately 10,000 vpm) favours the vibration of large granules (pebbles and gravel), while a high frequency (approximately 20,000 vpm) favours the vibration of fine granules (sand, cement and others).

They are used especially in the construction of concrete segments for tunnels, viaducts and bridges.

The OLI pneumatic vibrators have a **solid and durable body** made of ductile cast iron.


They are characterised by **high reliability and efficiency** as well as **compact size**.

Just like the electric vibrators, they may also be bolted or attached via quick-coupling clamps to formworks or moulds for the purpose of easy movement.



Benefits

- » Easy to handle
- » No electric component
- » Maintenance free

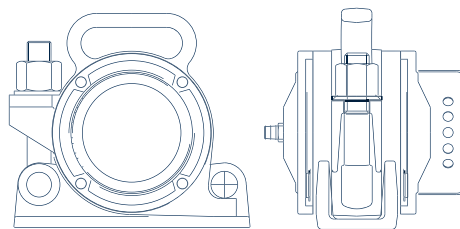

EFFICIENT AND RELIABLE



External pneumatic vibrators

G



H



I



J



MODEL	Drawing	Working Pressure	Fixing	Vibration	Centr. Force	Air Consump.	Noise Level	DIMENSIONAL SPECIFICATIONS (inch)										
		psi	Model	vpm	lb	CF/min	dB [A]	A	B	C	D	E	F	G	H	I	Weight	lb
HFP 600P	G	94.3	Plate	17,000	1,587	35	100	4.37	8.66	7.09	0.79	6.46	0.79	-	2.36	5/8"	13.9	
HFP 1000P		94.3	Plate	16,500	2,474	39	100	4.37	8.66	7.09	0.79	6.46	0.79	-	2.36	5/8"	15.9	
HFP 1400P		94.3	Plate	16,000	3,203	42	100	4.37	8.66	7.09	0.79	6.46	0.79	-	2.36	5/8"	16.1	
HFP 600C	H	94.3	CRS055	17,000	1,587	35	100	4.72	7.09	-	-	6.46	-	0.71	3.70	5/8"	13.9	
HFP 1000C		94.3	CRS055	16,500	2,474	39	100	4.72	7.09	-	-	6.46	-	0.71	3.70	5/8"	15.9	
HFP 1400C		94.3	CRS055	16,000	3,203	42	100	4.72	7.09	-	-	6.46	-	0.71	3.70	5/8"	16.1	
HFP 2721C	I	94.3	CRS080	16,000	6,069	57	103	8.82	9.25	-	-	6.30	-	0.94	3.31	5/8"	30.9	
HFP 4021C		94.3	CRS080	15,200	8,993	64	103	8.82	9.25	-	-	6.30	-	0.94	3.31	5/8"	32.0	
HFP 6021C		94.3	CRS080	14,500	13,488	64	103	8.82	9.25	-	-	6.30	-	0.94	3.31	5/8"	36.6	
HFP 4001C*	J	94.3	CRS080	10,200	8,993	64	90	8.46	9.25	-	-	7.09	-	0.94	3.31	5/8"	35.3	

* Silent model; measured at 1 mt distance

HFP - EXTERNAL PNEUMATIC VIBRATORS

APPLICATION Concrete formworks on site
Concrete moulds in precast industry

FEATURES

WORKING PRESSURE 94.3 psi

AIR SUPPLY QUALITY Class 5.4.4

WORKING TEMPERATURE 14°F / +140°F

MAX NOISE LEVEL 103 dB(A)
Silent version HFC 4001C: 90 dB(A) at 1 meter distance

TECHNOLOGY Eccentric rotor

MATERIALS Steel and cast iron

FINISHING Painted: orange RAL 2009

CERTIFICATIONS



I M2 Ex h I 150°C Mb
II 2G Ex h IIC T6 GB, 2D Ex h IIIC T80°C Db




EU legal act and subsequent modifications: 2023/1230 EC - 2014/34/EU

ACCESSORIES

Fastening systems:
CLW (Clamp for Wooden formworks);
CLS (Clamp for Steel formworks);
CRS (Cradle for Steel concrete moulds).

HFP model G
on CLW



HFP model I
on CRS





FASTENING SYSTEMS FOR EXTERNAL VIBRATORS


CLW

CLAMP FOR WOODEN FORMWORKS

APPLICATION	Quick mounting of vibrators on wooden formworks
SAFETY BELT	Included
FINISHING	Galvanized
COMPATIBLE VIBRATORS	Electric: up to size 30 Pneumatic: plate type

SUITABLE FOR (most common)

DOKA	H20, Top50, FF20
PERI	VT20K, GT24, VARIO GT24
MEVA	H20
PASCHAL	H20
NOE	H20
HÜNNEBECK	H20, R24, GF24, ES24

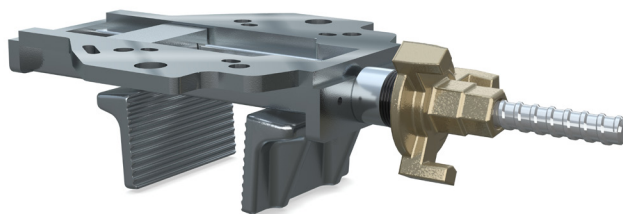

DIMENSIONAL SPECIFICATIONS

Model	Length	Width	Height	Weight	Multiple Footprint (mm)		
	in	in	in	lb	Electric	Pneumatic	
CLW 002	15.31	11.46	4.8	16,31	2.68x4.17	5.31x4.53	3.54x4.92

CLS

CLAMP FOR STEEL FORMWORKS

APPLICATION	Quick mounting of vibrators on steel formworks
SAFETY CABLE	Included
FINISHING	Galvanized
COMPATIBLE VIBRATORS	Electric: up to size 30 Pneumatic: plate type

SUITABLE FOR (most common)

DOKA	Framax XLife, Alu Framax XLife
PERI	Trio
MEVA	StarTec, Mammut
NOE	NOEtop



DIMENSIONAL SPECIFICATIONS

Model	Length	Width	Height	Weight	Multiple Footprint (mm)		
	in	in	in	lb	Electric	Pneumatic	
CLS 002	15.31	11.46	4.8	18.07	2.68x4.17	5.31x4.53	3.54x4.92

CRS

CRADLE FOR STEEL CONCRETE MOULDS

APPLICATION	Quick mounting of vibrators on steel concrete moulds
-------------	--

SUITABLE FOR

STEEL CONCRETE MOULDS

All OLI fastening systems are designed to be used with electric and pneumatic vibrators



CRS 055 - CRS 080



CRS 059

DIMENSIONAL SPECIFICATIONS

Model	Length	Width	Height	Weight	Radius
	in	in	in	lb	in
CRS 055	7.09	4.13	5.51	7.7	2.17
CRS 059	7.87	6.29	6.85	12.1	2.32
CRS 080	9.06	3.35	7.24	12.8	3.15



MSP-4 MULTIPLE SOCKETS PANEL

For simultaneously connection of formwork's vibrators




MSP-4 - CONNECTED TO THE OLI CONVERTER CMT35

Suitable to power up to 4 electric vibrators MVE 650/4N




MOUNTING SCHEME




MSP-4 - CONNECTED TO THE OLI CONVERTER CMT55

Suitable to power up to 6 electric vibrators MVE 650/4N

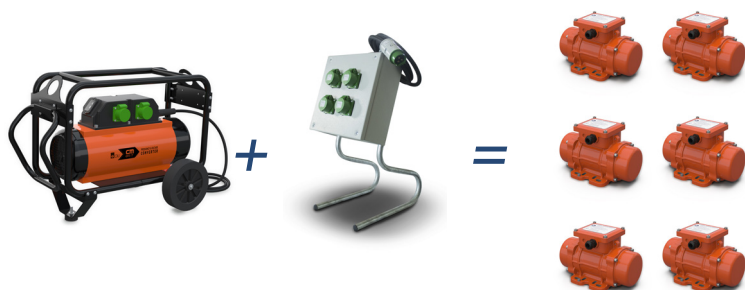


MOUNTING SCHEME




MSP-4 - CONNECTED TO THE OLI CONVERTER CMT85

Suitable to power up to 8 electric vibrators MVE 650/4N

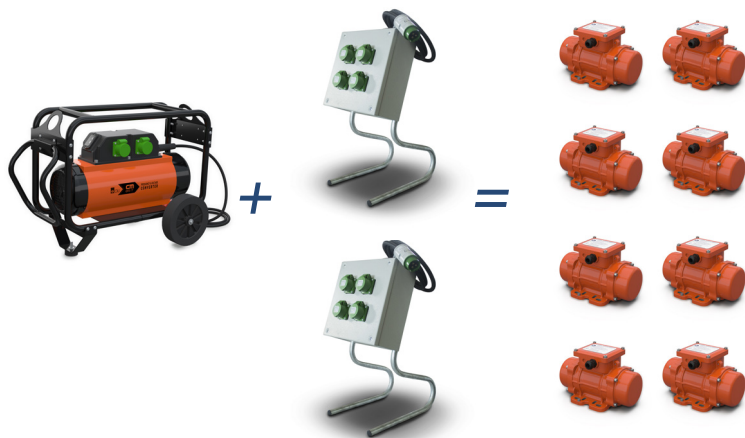

MOUNTING SCHEME

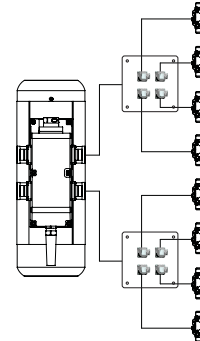

IMPORTANT

Never connect more vibrators than what suggested in the mounting schemes, even if there are unused output sockets.

SWITCH BOX KRV00095


For a better functioning of the vibrator it is advisable to use the special push-button panel (to use the switch box), which can be purchased separately.



INTERNAL VIBRATORS

EXTERNAL VIBRATORS

SYSTEMS DESIGN

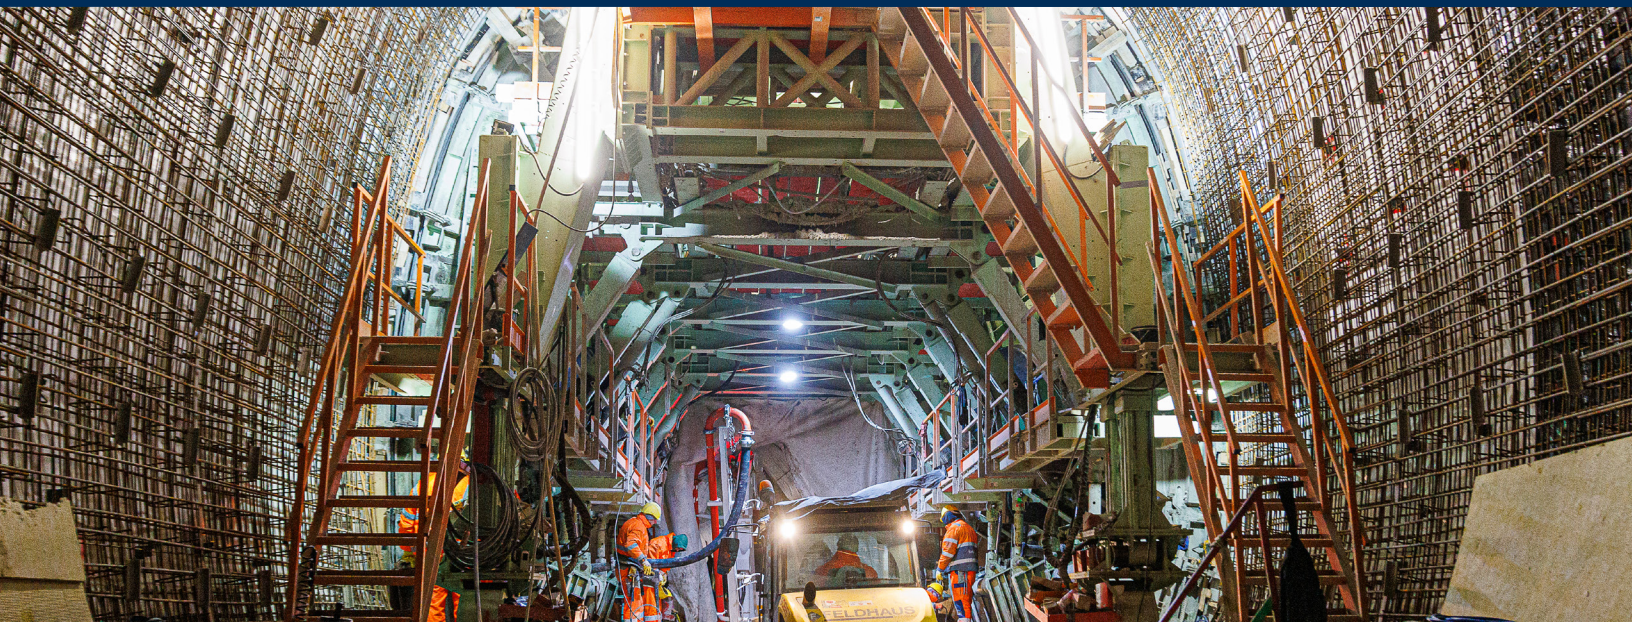

EXTERNAL VIBRATION SYSTEMS

In the construction sector, effective vibration is essential to ensure compact, air-free concrete with high mechanical performance. OLI offers a **comprehensive range of high-frequency external vibration systems**, designed to optimize the consolidation process and enhance the quality of concrete structures.

Choosing OLI for the construction of concrete consolidation plants means **relying on a dedicated technical team with extensive and long-standing expertise in the field**.

From the very first stages of design, OLI supports customers by providing **guidance** on the correct positioning and fixation of vibrators, ensuring optimal results in terms of durability and aesthetics of the finished product.

OLI is also able to supply **custom-designed systems**, both **electrical** and **pneumatic**, guaranteeing maximum operational efficiency.



Benefits

- » A single interface for consulting and product supply
- » Improved management and operational efficiency

**TURNKEY
PROJECT**



CONTROL SYSTEMS WITH ELECTRIC POWER SUPPLY

High-Frequency Vibration with Electric Power Supply



MOBILE



REMOTE CONTROL



STATIONARY

Each construction site or precast plant has its own specificities and needs. After a **detailed analysis of the production process**, OLI supports customers by providing tailor-made solutions that optimize site productivity.

OLI OFFERS A RANGE OF ELECTRIC VIBRATION SYSTEMS, INCLUDING:

- **Mobile control panels** with various output voltages and frequencies, from 2 to 10 outputs;
- **Mobile control panels** with distribution boxes for better cable management;
- Stationary panels with **remote control, PLC and dedicated software** designed for the specific application.

Additionally, OLI designs and supplies **fully automated solutions** for precast plants, complying with Industry 4.0 legislation, ensuring **greater efficiency and integration** into modern production processes.

OLI's high-frequency electric vibrators provide **intense and uniform action**, making them ideal for application on formworks and precast structures. Thanks to their energy efficiency and reliability, these systems ensure optimal concrete consolidation, reducing the risk of defects and **improving the durability of constructions**.

INTERNAL VIBRATORS

EXTERNAL VIBRATORS

SYSTEMS DESIGN

PLANT REALIZATION STAGES:



1. Customer request analysis
2. Sizing
3. Project development
 - Supply of electrical system
 - Supply of pneumatic system
4. Installation





Mobile Control Panel Range



INTERNAL VIBRATORS

EXTERNAL VIBRATORS

			INPUT					OUTPUT				
MODEL	Power	Sockets	Voltage & Frequency	Current	Power	Power Plug	Power Cable Length	Voltage & Frequency *		Current	Power	Sockets
	Hp	q.ty	V/F	A	kW	Type CEE	m	V/F		A	Hp	Type CEE
EC42/4M	5.4 / 8.6	4	380/480V 50/60Hz 3 PHASE	26/33	7.5/11	32A 3P+PE	5	42V 3ph	0-100 Hz 0-150 Hz 0-200 Hz	103A/151A	5.4 / 8.6	3P 32A 4H 50V 100-200Hz
EC42/6M	8.0 / 12.9	6		33/41	11/15	32A 3P+PE 63A 3P+PE				151A/206A	8.0 / 12.9	
EC42/8M	10.7 / 17.2	8		41/48	15/18.5	63A 3P+PE				206A/254A	10.7 / 17.2	
EC42/10M	13.4 / 21.5	10		48/52	18.5/22	63A 3P+PE				254A/302A	13.4 / 21.5	
EC400/4M	5.4 / 8.6	4		26/33	7.5/11	32A 3P+PE		400V 3ph	0-100 Hz 0-150 Hz 0-200 Hz	18.5A/25A	5.4 / 8.6	4P 16A 10H 50-500V 100-300Hz
EC400/6M	8.0 / 12.9	6		33/41	11/15	32A 3P+PE 63A 3P+PE				25A/32A	8.0 / 12.9	
EC400/8M	10.7 / 17.2	8		41/48	15/18.5	63A 3P+PE				32A/38A	10.7 / 17.2	
EC400/10M	13.4 / 21.5	10		48/52	18.5/22	63A 3P+PE				38A/45A	13.4 / 21.5	


* Also available at 230V
Made-to-measure extensions cords available

Selection Chart

Maximum number of vibrators that can be connected simultaneously

				OUTPUT			
MODEL	Size	Power	Sockets	Vibrators with Power from 0-1kW	Vibrators with Power from <1-1.6kW	Voltage & Frequency *	
	in	Hp	q.ty	q.ty		V/F	
EC42/4M	23.6 x 39.4 x 19.7	10.1	4	4	2	42V 3ph	0-100 Hz 0-150 Hz 0-200 Hz
EC42/4M		14.8		4	4		
EC42/6M		14.8	6	6	4		
EC42/6M		20.1		6	6		
EC42/8M		20.1	8	8	6		
EC42/8M		24.1		8	8		
EC42/10M		24.1	10	10	8		
EC42/10M		29.5		10	10		
EC400/4M	23.6 x 39.4 x 15.7	10.1	4	4	2	400V 3ph	0-100 Hz 0-150 Hz 0-200 Hz
EC400/4M		14.8		4	4		
EC400/6M		14.8	6	6	4		
EC400/6M		20.1		6	6		
EC400/8M		20.1	8	8	6		
EC400/8M		24.1		8	8		
EC400/10M		24.1	10	10	8		
EC400/10M		29.5		10	10		

SYSTEMS DESIGN

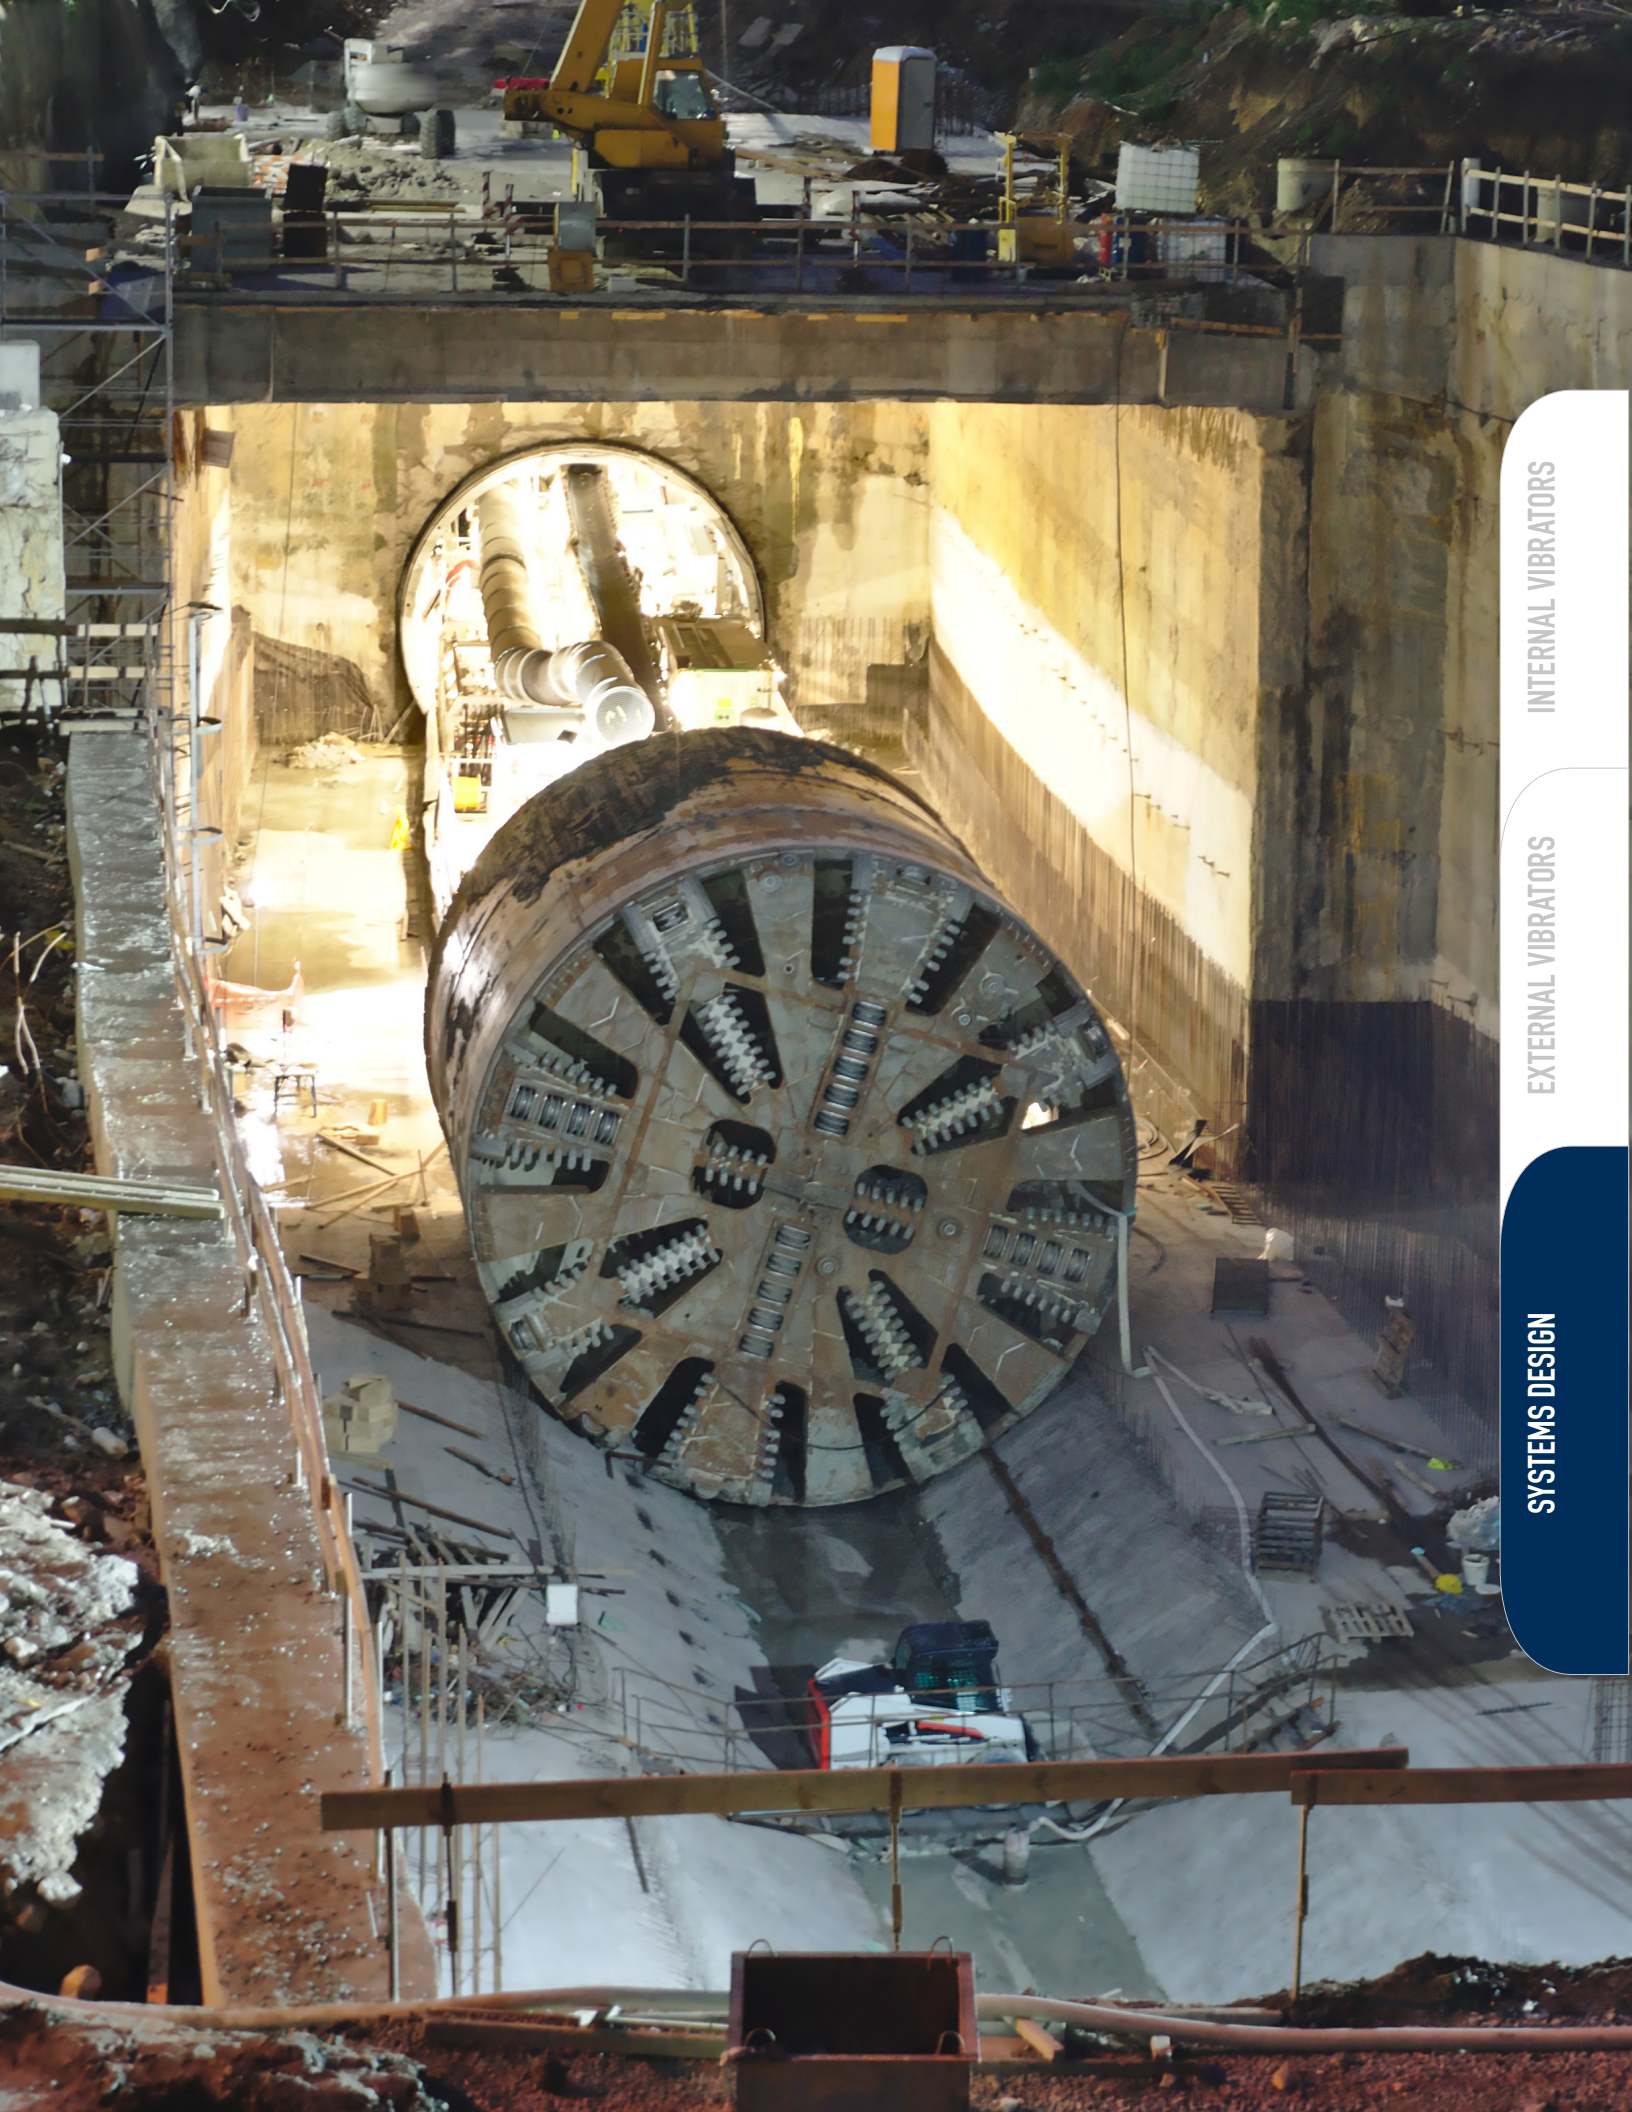

SYSTEMS DESIGN

EXTERNAL VIBRATORS

INTERNAL VIBRATORS



VIBRATION SYSTEMS WITH PNEUMATIC POWER SUPPLY



Solenoid valve



Main distribution line with ball valves and fittings

Pneumatic vibrators are the ideal solution for industrial environments and construction sites where compressed air is the preferred or required power source. These devices, free from electrical components, **ensure safety in challenging conditions** while delivering **constant** and **effective** vibration for perfect concrete compaction.

OLI is also able to study and **supply air distribution systems** (excluding the compressor) that ensure the **optimal air flow rate** needed to maximize efficiency, both for construction sites and precast plants that use pneumatic vibrators.

SOME EXAMPLES OF SOLUTIONS OFFERED BY OLI INCLUDE:

Main distribution lines

Flexible pipes for connecting the vibrators.

Ball valves and fittings

Fully automated electro-pneumatic control panels with solenoid valves and PLC, featuring dedicated control software specifically designed for the application.

Control Panels and Remote Activation

To ensure seamless integration and precise control

of the vibration process, OLI designs and supplies customized control panels, tailored to meet customer needs.

These systems allow for centralized management of vibrators, enhancing efficiency and reliability in concrete consolidation.

Additionally, the vibration system can be activated via remote control, providing greater convenience and safety in construction and production operations.

TECHNICAL CONSULTING FOR PLANT DESIGN

Beyond providing high-quality products, OLI offers a **highly specialized consulting service** for the design of vibration systems. Our experts assist customers in

selecting the most suitable solutions **for their specific needs**, ensuring seamless integration of vibration technology into production processes.






OLI'S PATENTED AUTOMATIC ARM FOR CAROUSEL SYSTEMS

OLI continuously invests in R&D to deliver cutting-edge solutions in industrial vibration.

Among its most significant innovations, OLI holds the patent for **the connector of the automatic arm** designed for **carousel systems**, a technology that optimizes vibration application in production processes,

increasing the operator's safety and reducing processing times.

With OLI, **innovation meets reliability**, delivering high-performance, efficient vibration systems that can be tailored to any concrete consolidation requirement.

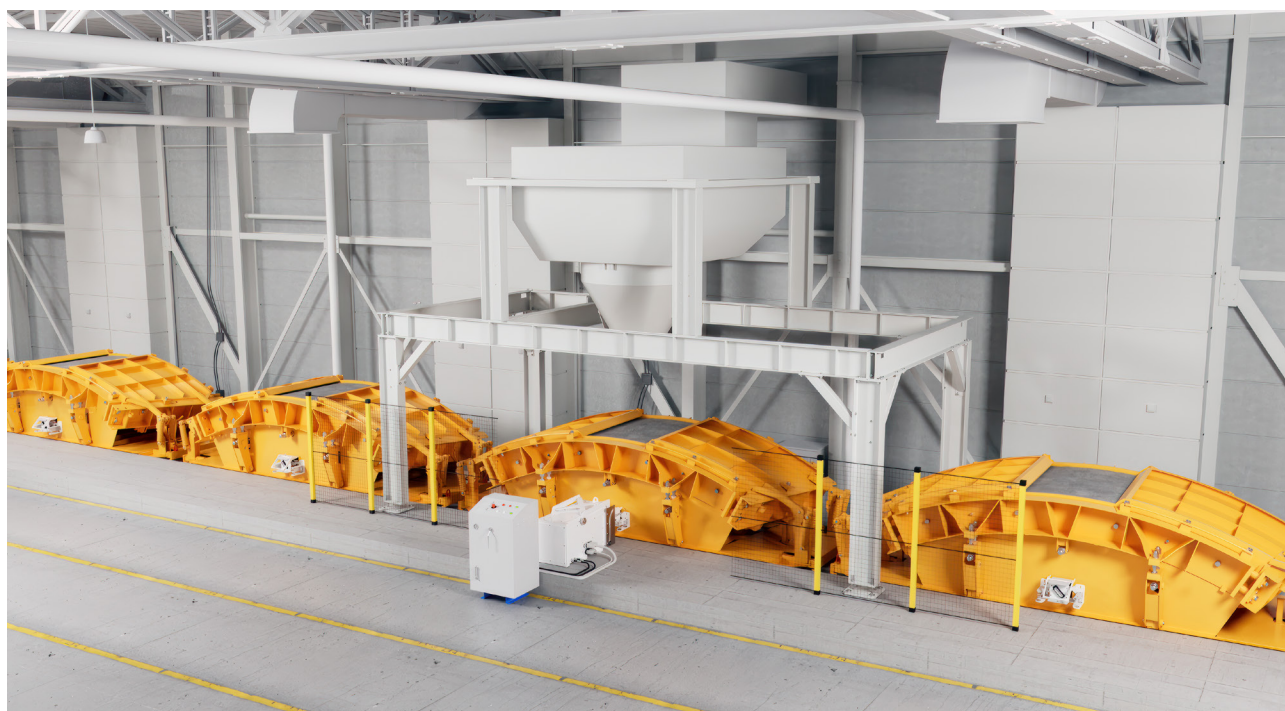

INTERNAL VIBRATORS

EXTERNAL VIBRATORS

SYSTEMS DESIGN

Note:



Tips and recommendations for use

TIPS FOR CHOOSING THE INTERNAL VIBRATOR

Selection of the needle diameter

Factors to be taken into consideration:

- composition of the concrete
- quantity of reinforcements (percentage of reinforcement inside the concrete element)
- size of the spaces between the various reinforcements (mesh sizes)
- thickness of the concrete layer

The diameter to be used must allow the maneuver of the vibrator inside the reinforcement, without getting stuck in the mesh.

Definition of the operating tube length

It must be longer than the depth of the manufactured article in order to allow the vibration of the deeper layers.

TIPS FOR CHOOSING THE EXTERNAL VIBRATOR

Pneumatic or electric?

The choice depends on the type of power available (electricity or compressed air).

What type of fastening?

It depends on the construction material and on the shape of the profiles to which the vibrators have to be fastened.

Definition of the positioning

It depends on the size and the shape of the formwork or mold.*

Definition of the operating cycle

The number of vibrators to run simultaneously depends on the size of the formwork or mold and on the pour rate of the plant.

It is important to run the vibrators only when the concrete is inside the formwork or mold in order to avoid resonance or vibration out of control.*

Definition of the power supply

Standard frequency electric vibrators (3000RPM) can be connected DOL (Direct On Line).

High frequency electric vibrators (6000RPM) is mandatory to connect to control panels according to the input voltage and frequency of the chosen vibrators.

Pneumatic vibrators for concrete consolidation must be connected to air supply as indicated in the catalogue.

* For the right positioning and operating cycle please refer to OLI Technical support.

MAIN RECOMMENDATIONS FOR USE

Repeated vibration

It means vibrating the already compacted concrete again. This technique is used to mix successive layers of concrete in order to improve the surface finish quality of columns and walls and to increase their strength and wear resistance.

Vibration inside the formwork

Make sure that the vibrating head does not touch the interior walls because, besides damaging them, it could generate depressions in the manufactured article, thus deteriorating the quality of the surfaces. Vibrators with rubber tips may be used to reduce this problem.






Insufficient vibration

It is the most common problem. Insufficient vibration can alter the structural properties, causing problems such as: lower resistance, higher abrasion, higher permeability, and consequently shorter duration and poor surface quality.

Excessive vibration

The use of oversized equipment generates the segregation of the aggregates, in addition to the damage incurred to the formwork and moulds.

Technical drawings

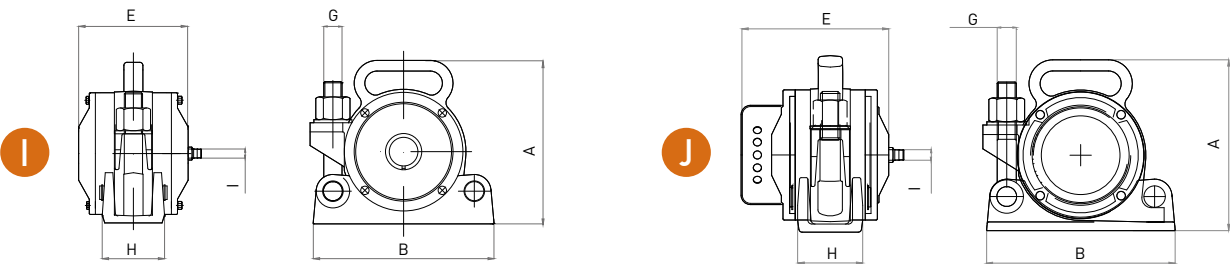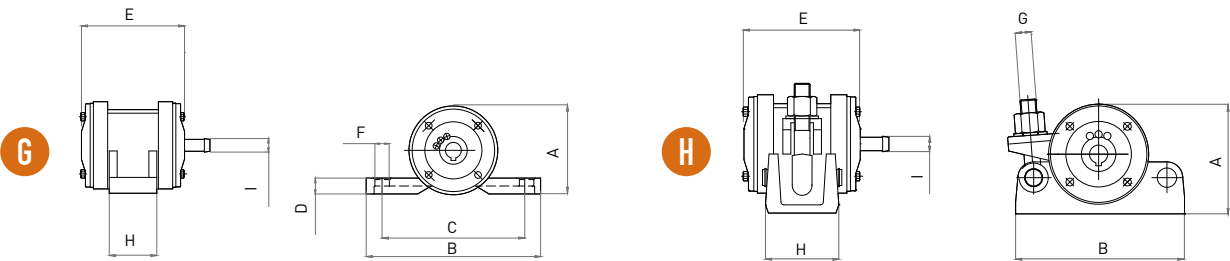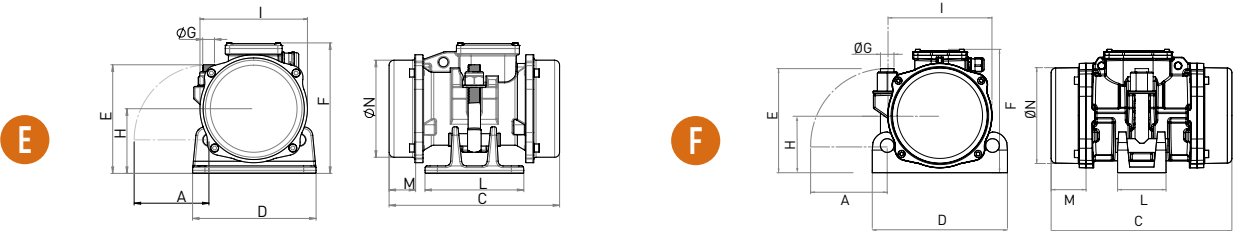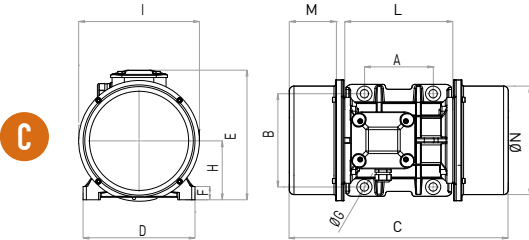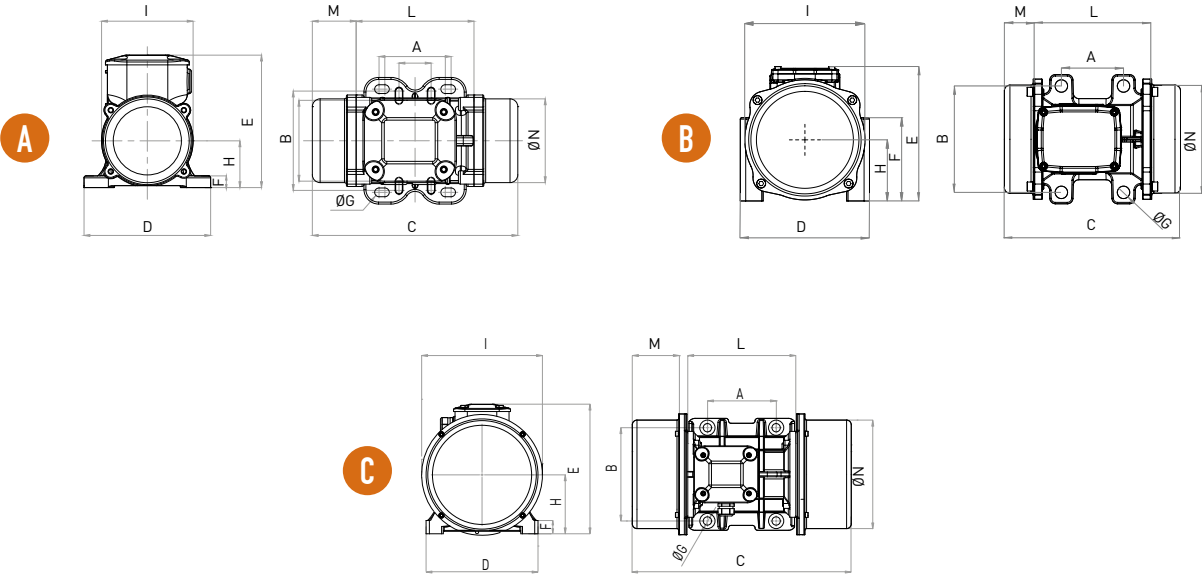

WHEN YOU NEED IT, WHERE YOU NEED IT.

THE WORLDWIDE LEADER IN VIBRATION TECHNOLOGY

www.olivibra.com



OLI Headquarters

Via Sparato, 14
41036 Medolla (MO) - Italy

+39 0535 41 06 11

info@olivibra.com

OLI U.S.A.

2625 N. Berkeley Lake Rd.
Suite # 500, Duluth, Ga 30096 - USA

770.622.1494

sales@olivibrator.com

OLI worldwide

OLI Australia
OLI Brazil
OLI China
OLI France
OLI Germany
OLI India

OLI Indonesia
OLI Italy
OLI Korea
OLI Malaysia
OLI Malta
OLI Mexico

OLI Middle East
OLI Nordic
OLI Poland
OLI South Africa
OLI Spain
OLI Thailand

OLI Turkey
OLI UK
OLI USA
OLI Vietnam

