


VBS Bin Aerators


One-Way air fluidizer for dry, fine, granular powders



POWERED BY TRAMONTANA™ DISK FLUIDIZER (PATENT PENDING)

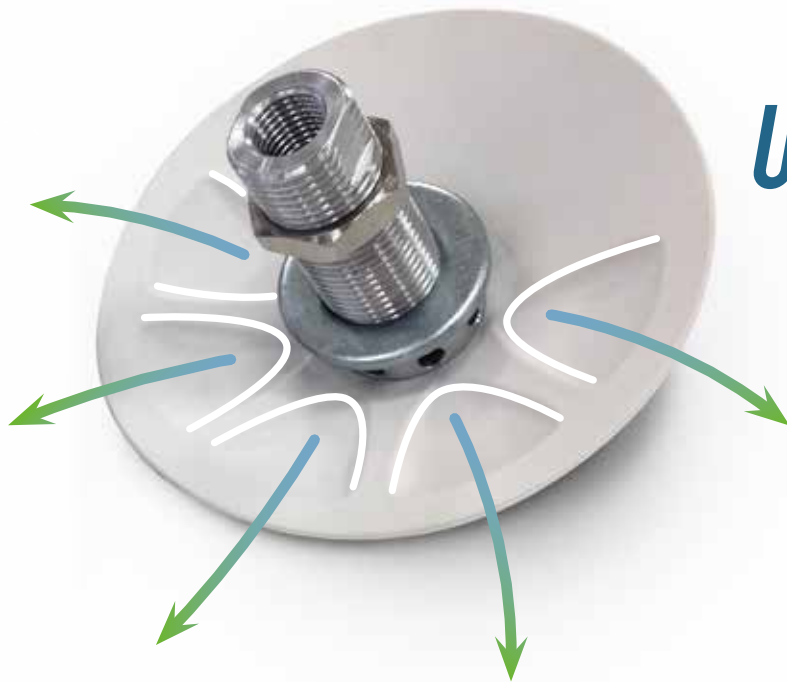

**UNIQUE
ONE-WAY
DIRECTIONAL
AIR FLOW**




**New and innovative design
improves productivity**

Designed to maximize system
efficiency: the fastest loadout speed



Food & Pharmaceutical Grade

Made with FDA
approved components



TRAMONTANA™ Disk Fluidizer

One-way directional air flow
boosts powder discharge



**AERATORS FOR
SILOS, HOPPERS, PIPES**





Features

NEW, INNOVATIVE, REVOLUTIONARY: TRAMONTANA™ DISK FLUIDIZER

The VBS is designed to maximize unloading efficiency: the TRAMONTANA™ disk fluidizer (patent pending) boosts powder discharge speed thanks to its unique shape.

**NO COMPROMISE.
CHOOSE THE BEST
TECHNOLOGY.**

VBS - BIN AERATORS



APPLICATION	Silos, hoppers, pipes
POWDER	Dry, fine, granular
PROBLEM SOLVING	Bridge and rat-holing

FEATURES

DUTY CYCLE	Continuous or discontinuous
WORKING PRESSURE	From from 12 psi to 87 psi (0.8 bar to 6 bar) recommended 58 psi (4 bar) MICRO VBS from 12 psi to 29 psi (from 0.8 bar to 2 bar)
PNEUMATIC CIRCUIT	Filter + flow control valve
AIR SUPPLY QUALITY	Non-Lubricated (Class. 5.4.1)
TECHNOLOGY	Vibro-Aerator
MATERIAL	Silicone membrane [food grade] - FDA 177.2600 Aluminium / stainless steel stem [Food & Pharmaceutical grade]

OPTIONS

EXTERNAL MOUNTING KIT	Stainless steel rectangular plate and circular plate
-----------------------	--



VBS Complete range

PRODUCT *	PICTURE	MEMBRANE COLOUR	STEM MATERIAL	MEMBRANE DIAMETER	
				mm	in
VBS	A	White	Aluminium	104	4
VBSI	A	White	Stainless steel	104	4
VBSIHT	A	Red	Stainless steel	104	4
VBSIMD	A	Blue	Stainless steel	104	4
VBSM	B	White	Aluminium	54	2.1
VBSMI	B	White	Stainless steel	54	2.1
VBSMIHT	B	Red	Stainless steel	54	2.1
VBSMIMD	B	Blue	Stainless steel	54	2.1
VBSME	D	White	Nylon	54	2.1



Comparison chart – OLI vs. competitors



DURABILITY

COMPETITORS

OLI

Durable disk	Acceptable	Higher durability due to thicker profile in high wear areas
Max. temperature	340°F (170°C)	340°F (170°C) Red colour only: 455°F (235°C)



EFFICIENCY

Enhanced air fluidizer	No	TRAMONTANA™ disk: the Venturi style disk cavity of the VBS boosts air flow in the direction of the discharge reducing load-out time and air consumption
Loadout speed*	Good	25% faster than closest competitor



DESIGN

Smooth disk outer wall	No	Smooth disk outer wall to avoid material sticking to its surface, thus increasing product flow
Food-grade	Option	Option
Metal detectable disk	Option	Standard
Interchangeability	-	Yes
External mounting	Option	Option:

- Rectangular shape




- Circular shape



* Based on testing conducted by WAMGROUP and field test.
Competitors' data are the ones commercially available on the market. We do not take any responsibility regarding the accuracy of the above data.

CUT YOUR
DISCHARGE
TIME. NOW.



WHEN YOU NEED IT, WHERE YOU NEED IT

THE WORLDWIDE LEADER IN VIBRATION TECHNOLOGY



WORLDWIDE SUBSIDIARIES

OLI Australia
OLI Benelux
OLI Brazil
OLI China
OLI France
OLI Germany
OLI India
OLI Indonesia

OLI Italy
OLI Korea
OLI Malaysia
OLI Malta
OLI Mexico
OLI Middle East
OLI Nordic
OLI Poland

OLI Russia
OLI South Africa
OLI Spain
OLI Thailand
OLI Turkey
OLI UK
OLI USA
OLI Vietnam



OLI VIBRATOR

2625 N. Berkeley Lake Rd., Suite # 500
Duluth, Ga 30096 - USA

☎ 770-622-1494

✉ sales@olivibrator.com

WWW.OLIVIBRA.US

OLI Headquarters

Medolla (MO) - Italy

✉ info@olivibra.com

WWW.OLIVIBRA.COM